

NB-FT20KL



NUSATAMA


PT. NUSATAMA BERKAH

Jl. Raya Narogong Km. 14 Pangkalan V Bantar Gebang Bekasi 17152
Phone : 021 - 227 831 98 / 227 082 49 Whatsapp : 085211881421
e-mail : info@nusatama.com
www.nusatama.com

PT. Nusantara Berkah Tbk.
WhatsApp business account



SPECIFICATION

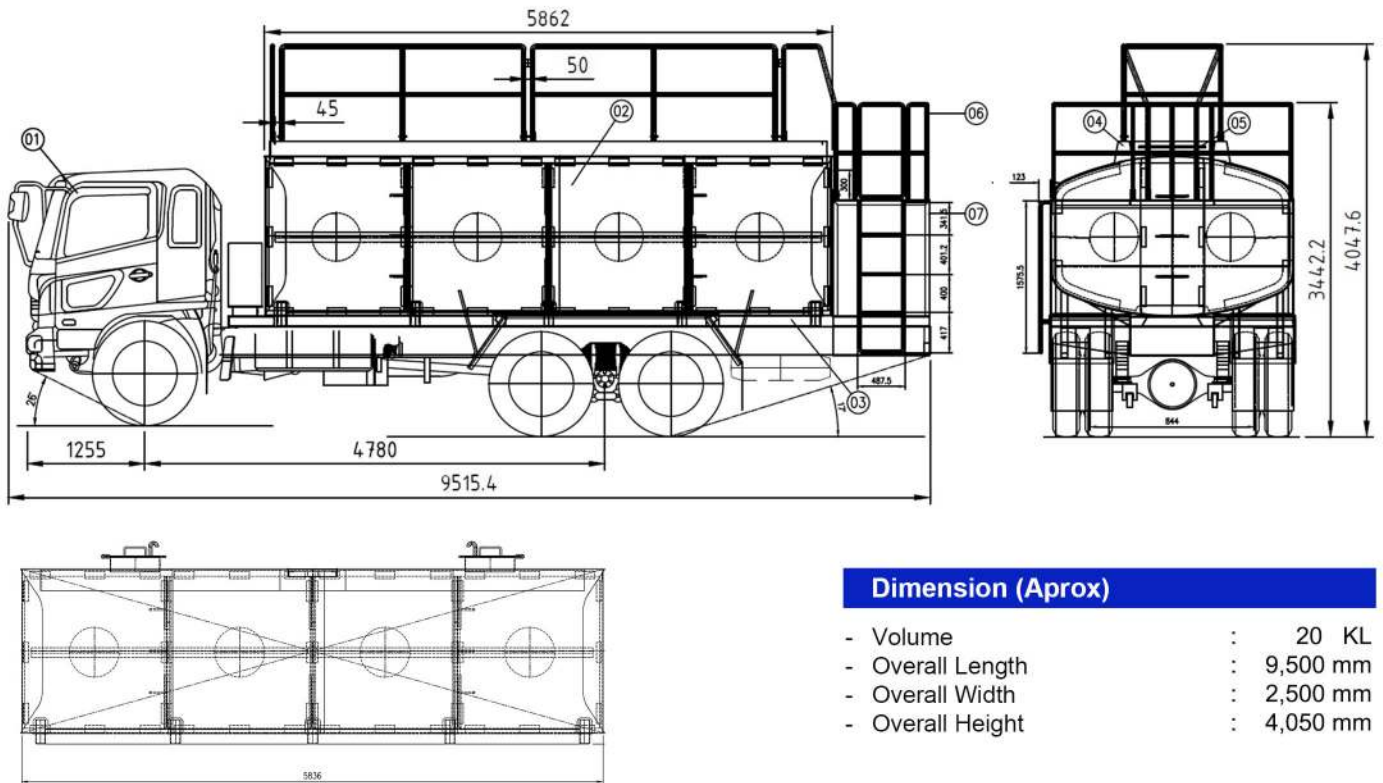

Dimension (Aprox)

- Volume	: 20 KL
- Overall Length	: 9,500 mm
- Overall Width	: 2,500 mm
- Overall Height	: 4,050 mm

Materials

- Shell and Head	: Plate SS400 t 6 mm
- Baffle	: Plate SS400 t 4.5 mm
- Sub Frame	: Plate SS400 t 6 mm & 5 mm
- Platform	: Checkered plate t 4.5 mm
- Load Guide	: Plate SS400 t 6 mm
- Hand Rail	: Medium Pipe D 1 1/4" & D 1 1/2"

Main Component

- Fuel Pump	: CORKEN Fuel Vane Pump, Port size 2", flow range 550 LPM (PZ10) or equivalent
- Flow Meter	: LIQUID CONTROL flow meter, model M10, port size 2", flow range 550 LPM, mechanical register (M10-C1) or equivalent
- Hydraulic Pump	: VICKERS p/n 25VQ-21A or Hyva Model 145620035 or equivalent
- Hydraulic Motor	: VICKERS Motor M26-42A or equivalent
- Manifold Block	: Customized Solenoid c/w Relief Valve
- Filter	: CIMTEK fuel filter CENTURION IV (Filter Housing) port size 2", flow rate 340 LPM / 90 GPM or equivalent
- Hose Reel	: GRACO hose reel XD 40 series size 1" reel only (complete hose + ball stop) or equivalent GRACO hose reel XD 50 series size 1.5" reel only (complete hose + ball stop) or equivalent
- Fuel Nozzle	: FLOMAX fuel nozzle complete with swivel or equivalent

Equipment

- Rear Axle	: Steel mud guard and rubber flaps
- Spare Tire	: Mounted under chassis

Electric & Pneumatic Parts

- Electric Voltage	: 24 Volt
- Rear Lamp Protection	: Steel Protection
- Pneumatic Hose	: Nylon Tube

Finishing

- Surface Preparation	: Sand blasting and Epoxy Primer Coat thickness 90 µm
- Painting	: Synthetics Paint thickness 70 µm