



NB-MX8CBM

“World’s first and only electrostatic powder sprayed concrete mixer”



ISO 9001:2015



NUSATAMA

PT. NUSATAMA BERKAH

SPECIFICATION



Your long term & trusted partner

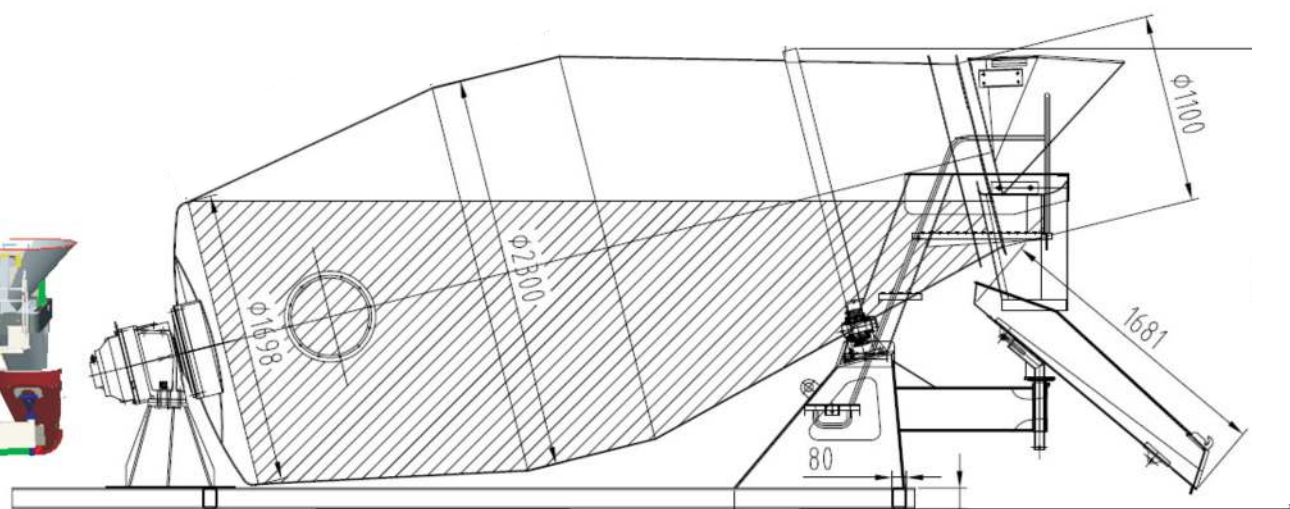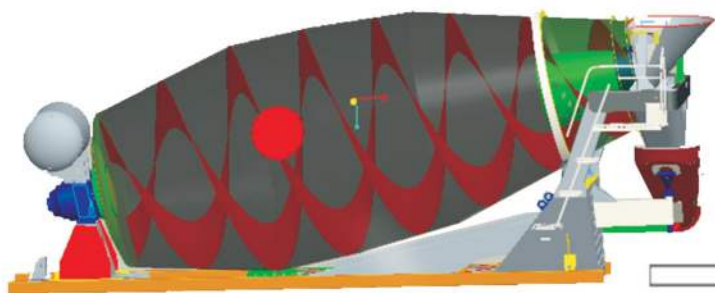

Capacity

- Nominal Mixing Capacity	:	8 m ³
- Agitator Mixing Capacity	:	≥7.5 m ³
- Geometrical Capacity	:	13.4 m ³
- Filling Ratio (Nominal Cap./Drum Vol.)	:	59.70 %
- Charging Time (s/m ³)	:	≥2.7 (m ³ /min)
- Discharging Time (s/m ³)	:	≥1.2 (m ³ /min)
- Water Tank	:	600 L
- Oil Cooler	:	18L

Dimension

- Section 1	:	1565 mm
- Section 2	:	760 mm
- Section 3	:	1311 mm
- Diameter	:	2300 mm
- Max. Drum Length	:	4250 mm
- Max. Drum Inside Diameter	:	2300 mm
- Weight	:	4 T

Hydraulic System

Hydraulic system adopts famous brand, making the products quality reliable

- Hydraulic Pump : EATON 54 (USA)
- Hydraulic Motor : EATON 54 (USA)
- Gear Box : PMP 6.5 (ITALY)

Drum & Blade

Drum is designed as pearl shape to make the inclination angle small, gravity center low, driving stable and safe.

Drum and blade are both made of special high tensile steel, high wear resistance, long lifetime.

- Drum Inclination (degree) : 14°
- Drum Speed : 0 - 16 RPM
- Drum Material : 750GJ
- Drum Tensile Strength : ≥1000 (N/mm²)
- Blade Tensile Strength : ≥1000 (N/mm²)
- Steel Thickness
 - Drum Bottom Outer Part : 6mm
 - Drum Inner/Cylindrical/Rear Part : 3.5mm
 - Spiral Blade : 4mm

Operating System

Operating system is composed by accurate positioning and reliable control by handles. Control points are located in cabin, the left side and right side of rear truck. Control system structure tight, control flexible and reliable

Head Office

18 Office Park 6th Floor Suite C
Jl. TB Simatupang Kav. 18
Jakarta 12520
Phone : +62-21-22783198
+62-21-22708249

Factory

Jl. Raya Narogong Km. 14
Pangkalan V Bantar Gebang
Bekasi 17152
Phone: +62-21-8250659
Fax: +62-21-8250248



nusatamaberkah



info@nusatama.com



www.nusatama.com

MB8MX-BN